


ELECTROSTATIC FLOOR PAD




Caractéristiques

Composition : 100% Polyester
 Weight : 50 g/m²
 Thickness : 0.6 mm
 Absorption : 850%

	MD	CD
Resistance	165 N	42 N
Elongation	36 %	172 %

Tolerance +/- 5%

Benchmark

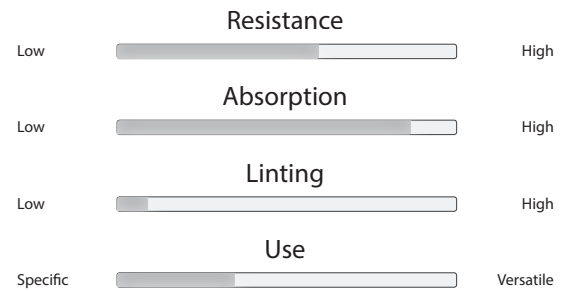

Assets

+ Economical PAD

- ✓ 1 electrostatic pad = 3 impregnated gauzes
- ✓ Until 40 sqm of covered surface


+ No linting / No deposit

- ✓ As our pad is not impregnated like gauze, there is no deposit of parafin or oil
- ✓ Electrostatic catching of the dust



Made in France

Product detail



Type	Reference	Dim (cm)	Packaging	pad/roll	Pack /pallet
Electrostatique PAD	C502902	20 x 60	6 rolls/pack (diameter 15cm)	100	28

Others dimension and packaging can be requested on demand

